

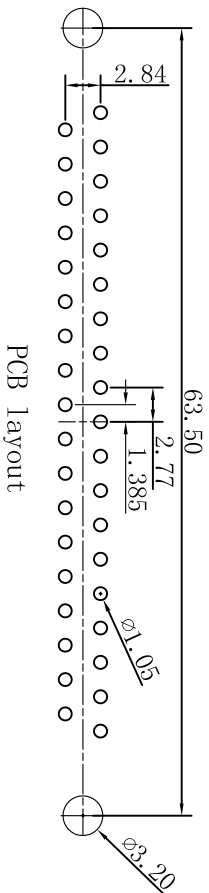
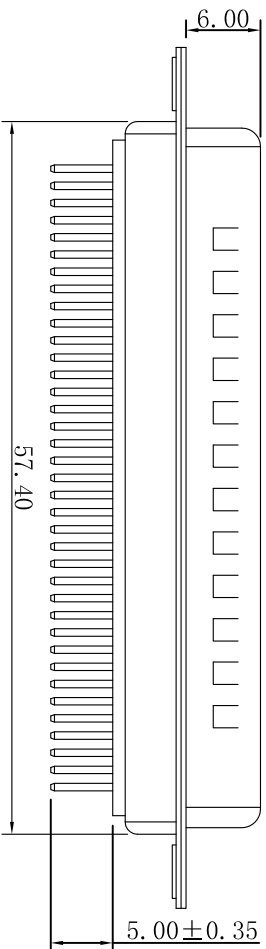



# GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2020.12.12	m t

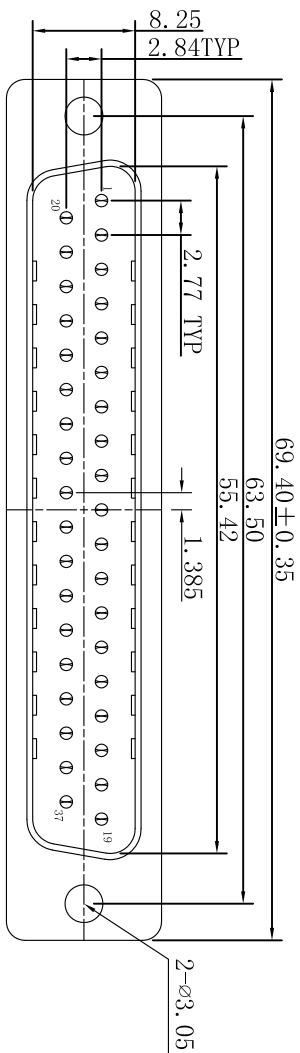

Specification Type

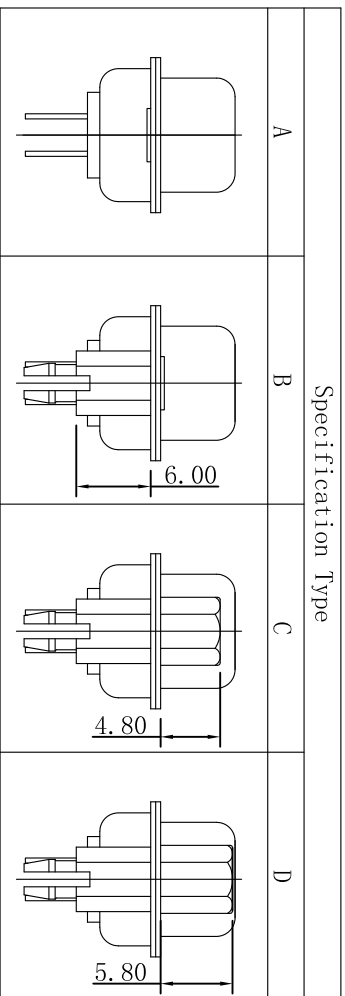

### CHARACTERISTICS:

- RATED VOLTAGE: 250V AC CD
- RATED CURRENT: 3.0AMP
- CONTACT RESISTANCE: 30mΩ Max.
- INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- Electric Pressure: Keeping 60 second in AC 500V/1mA
- Operating temperature: -55°C~105°C
- INSERTION/EXTRACTION FORCE PER CONTACT: 12.5Kg Max 1.1Kg Min.

### 01.DP0037 M X XXX XX A XXX

PIN Poles	37:37PIN	Water Code	
M/F Differentiates	M=Male F=Female	Specification Type	
Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Hsg Material	H1=PB1 HF H2=PA6T HF H3=PA9T HF H4=PA66 HF H5=LCF 10=PB1 11=PA6T 13=PA66 14=PA46 12=PA9T
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"	
	B00:Braight sn B01:Braight sn 1U" B03:Braight sn 3U" Bxx:Braight sn XXU"		

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd</p>	UNITS: mm [inch]	DESIGN: 牟 2020.12.12	PART NAME: DP 37M系列图
	TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	CHECKED: 牟 2020.12.12	PART NO. 01.DP0037MXXXXXX
SCALE:1:1 SIZE:A4	APPROVED: 牟 2020.12.12	DRAW NO.	SHEET NO. 01 OF 01