
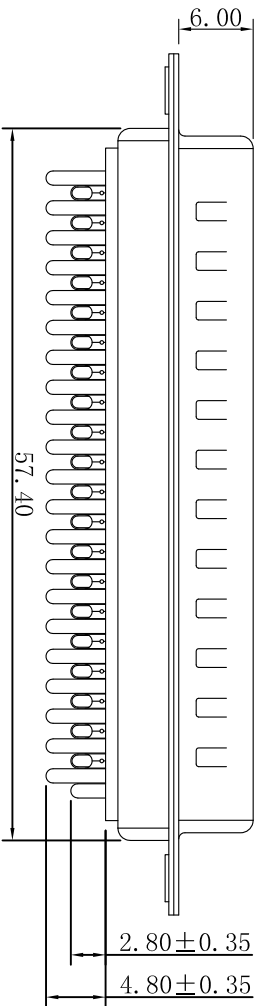



GP Component

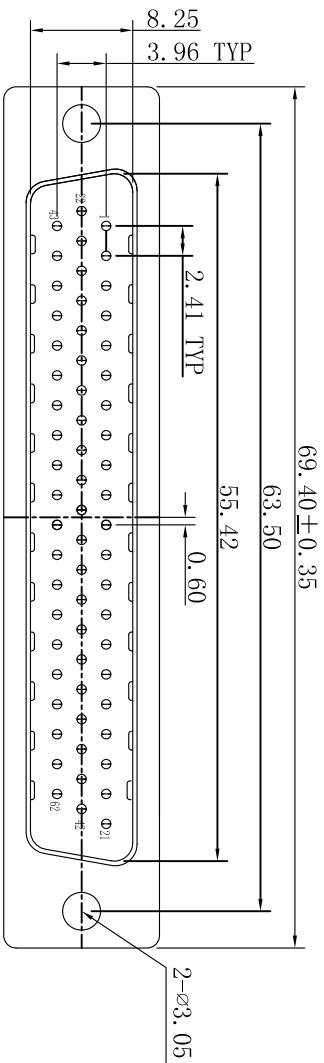

Specification Type

A	B	C
	4.00	5.90

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2020.12.02	m t

CHARACTERISTICS:

- 1、RATED VOLTAGE: 250V AC CD
- 2、RATED CURRENT: 3.0AMP
- 3、CONTACT RESISTANCE: 30mΩ Max.
- 4、INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
- 5、Electric Pressure: Keeping 60 second in AC 500V/1mA
- 6、Operating temperature: -55℃~105℃
- 7、INSERTION/EXTRACTION FORCE PER CONTACT: 13.2Kg Max
1.1Kg Min.

01.HDB062 M X XXX XX A XXX

PIN Poles	62:62PIN	Water Code	
M/F Differentiates	M=Male F=Female	Specification Type	
Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Hsg Material	H1=PB1 HF H2=PA6T HF H3=PA9T HF H4=PA66 HF H5=LCF H6=PB1 H7=PA6T H8=PA66 H9=PA6T H10=PB1 H11=PA6T H12=PA9T H13=PA66 H14=PA66
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"	

UNTR: mm [inch]	DESIGN: 2020.12.02	东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd	
		TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	PART NAME: HDB 62M系列图
CHECKED: 2020.12.02	PART NO. 01.HDB062MXXXXXXXXXX	APPROVED: 2020.12.02	DRAW NO. 01 OF 01
SCALE:1:1 SIZE:A4	SHEET NO.	DATE: 2020.12.02	SHEET NO.