
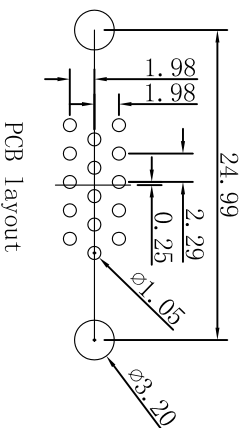
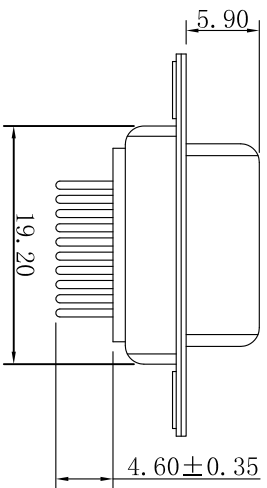



# GP Component

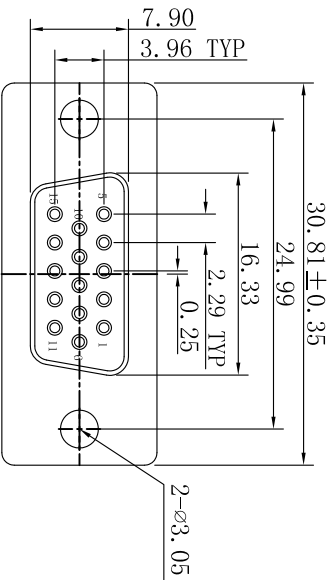

Specification Type

A	B	C	D
	6.00	4.80	4.80

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2020.12.13	m t



## CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 3.74Kg Max 0.33Kg Min.

## 01.HDP015 F X XXX XX A XXX

PIN Poles	15:15PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"
Water Code		Specification Type		Hsg Material	H1=PB1 HF H4=PA66 HF I0=PB1 I3=PA66				

 UNITS: mm [inch]	 东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd	DESIGN:	2020.12.13	PART NAME:	HDP 15P系列图
		CHECKED:	2020.12.13	PART NO.:	01.HDP015FXXXXXXXXXX
TOLERANCE:	X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	APPROVED:	2020.12.13	DRAW NO.:	
SCALE:1:1	SIZE:A4			SHEET NO.:	01 OF 01