

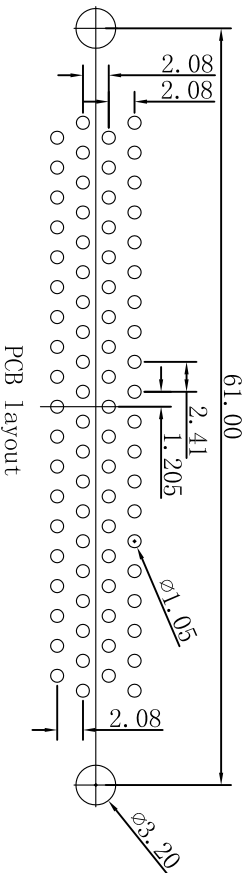
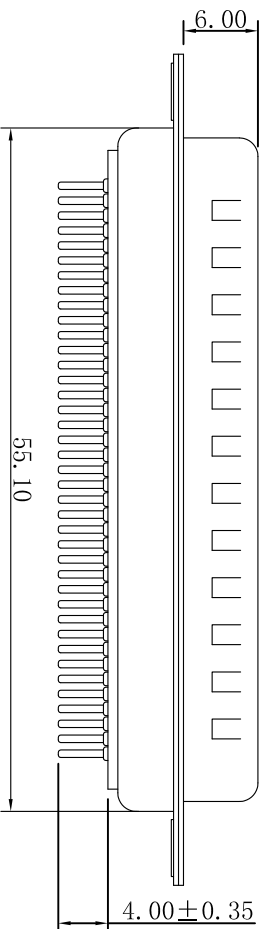



GP Component

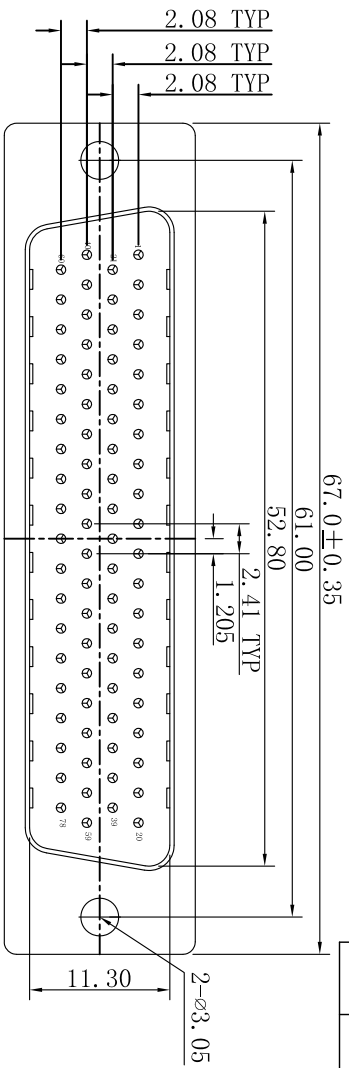

Specification Type

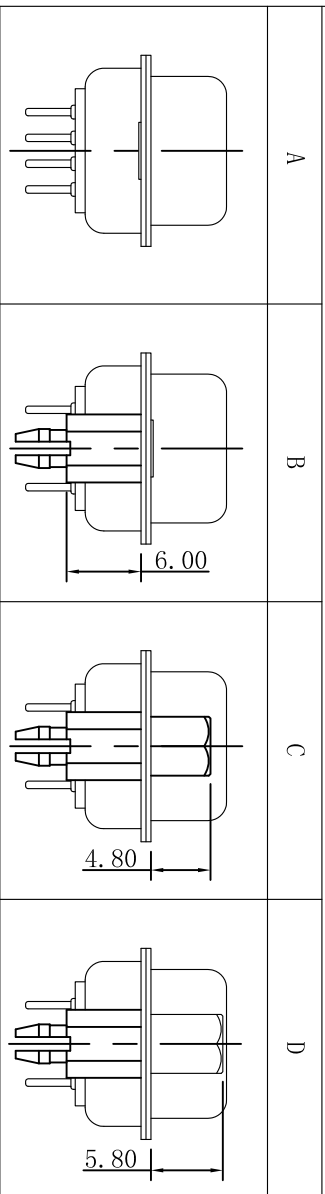

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
AO			原始版本(INITIAL EDITION)	2020.12.15	m t



CHARACTERISTICS:

1. RATED VOLTAGE: 250V AC CD
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55°C~105°C
7. INSERTION/EXTRACTION FORCE PER CONTACT: 17.6Kg Max
1.45Kg Min.

01.HDP078 M X XXX XX A XXX

PIN Poles	78:78PIN	M/F Differentiates	M=Male F=Female	Hsg Color	1=Black 3=Blue 5=Yellow 2=White 4=Green 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"
Water Code		Specification Type		Hsg Material					

<p>东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd</p>	UNITS: mm [inch]	DESIGN:	2020.12.15	PART NAME:	HDP 78M系列图	
	TOLERANCE:	X.X ±0.35	CHECKED:	2020.12.15	PART NO.	01.HDP078MXXXXXXXXXX
	X.XXX ±0.25	APPROVED:	2020.12.15	DRAW NO.		
	X.XXXX ±0.15	SCALE:1:1	SIZE:A4	SHEET NO.	01 OF 01	