

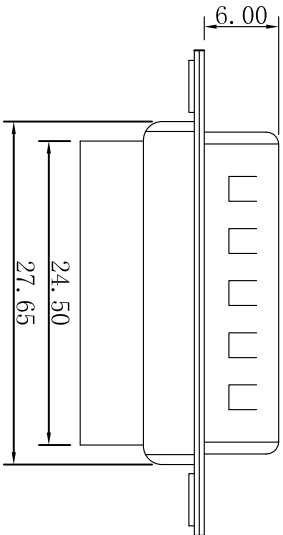



# GP Component

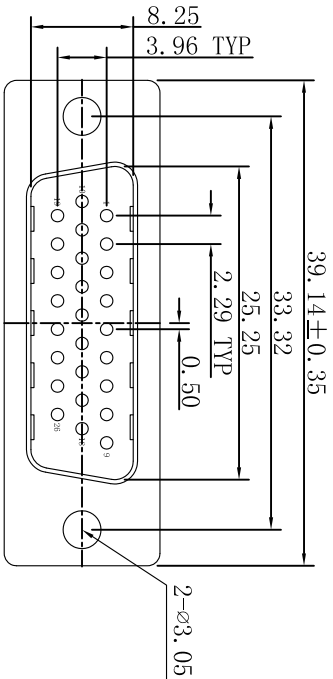

## Specification Type

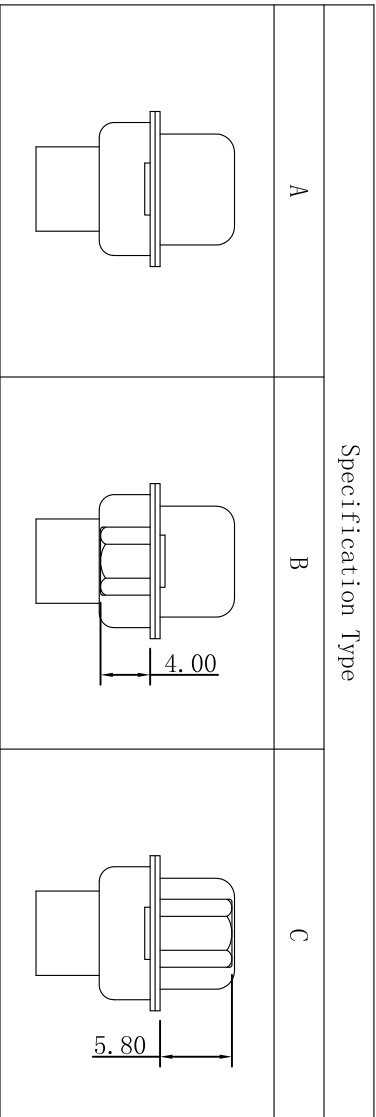

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

## CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 5.84Kg Max 0.45Kg Min.

01.HDEC26 M X XXX XX A XXX

PIN Poles	26:26PIN	M/F Differentiates	M=Male F=Female	Hsg Color	3=Blue 5=Yellow 1=Black 3=Blue 2=White 4=Green 6=Purple	Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"
Water Code		Specification Type		Hsg Material	H1=PB1 HF H4=PA66 HF H5=LCF H0=PB1 H3=PA6T H2=PA6T HF H8=PA9T HF H9=PA9T HF H12=PA9T H13=PA66 H14=PA46				

UNTR: mm [inch]	TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	DESIGN: 4 2021.01.05 CHECKED: 4 2021.01.05 APPROVED: 4 2021.01.05	东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co.,Ltd	PART NAME: HDPC 26M系列图	
				PART NO. 01.HDEC26MXXXXXXXXXX	DRAW NO. 01 OF 01
SCALE:1:1 SIZE:A4				SHEET NO.	