
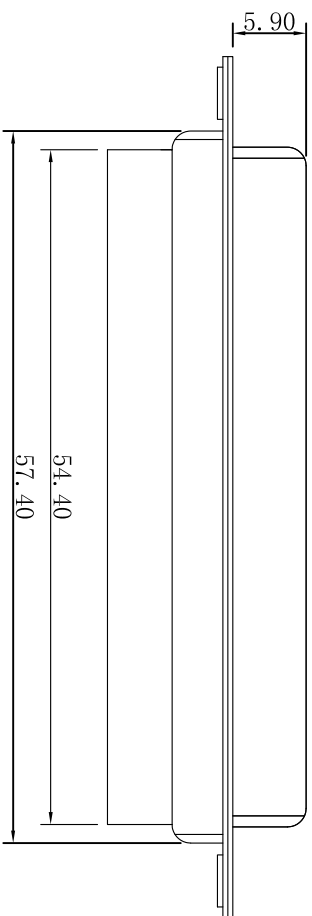



GP Component

REV.	ECN NO.	LOCATIONS	DESCRIPTION	DATE	DESIGN
A0			原始版本(INITIAL EDITION)	2021.01.05	m t

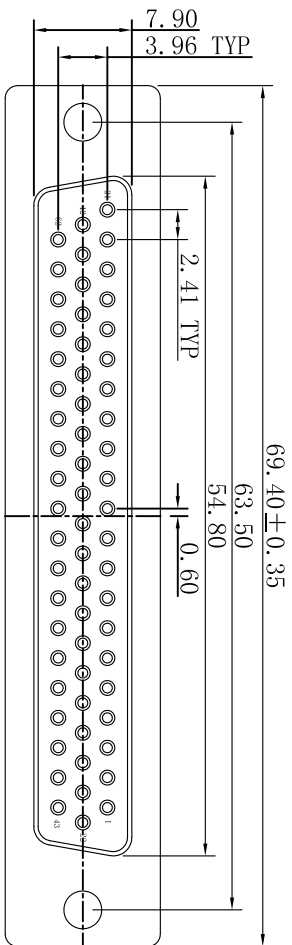

Specification Type

Specification Type	A	B	C

CHARACTERISTICS:

1. RATED VOLTAGE: 250V
2. RATED CURRENT: 3.0AMP
3. CONTACT RESISTANCE: 30mΩ Max.
4. INSULATION RESISTANCE: 1000 MΩ MIN. 500V DC
5. Electric Pressure: Keeping 60 second in AC 500V/1mA
6. Operating temperature: -55℃~105℃
7. INSERTION/EXTRACTION FORCE PER CONTACT: 13.2Kg Max
1.1Kg Min.

01.HDEC62 F X XXX XX A XXX

PIN Poles	62:62PIN				
M/F Differentiates	M=Male F=Female				
Hsg Color	1=Black 3=Blue 2=White 4=Green 5=Yellow 6=Purple				
Plating	G00:Gold flash G01:Gold 1U" G03:Gold 3U" Gxx:Gold XXU"	B00:Bright sn B01:Bright sn 1U" B03:Bright sn 3U" Bxx:Bright sn XXU"	M00:Matte sn M01:Matte sn 1U" M03:Matte sn 3U" Mxx:Matte sn XXU"		
Water Code					
Specification Type					
Hsg Material	H1=PB1 HF H4=PA66 HF I0=PB1 I3=PA66	H2=PA6T HF H5=ICP I1=PA6T I4=PA46	H3=PA9T HF I2=PA9T		

UNTR: mm [inch]	东莞市跃展精密连接器有限公司 Dongguan YueZhan Precision Connectors Co., Ltd	DESIGN: 卓涛 2021.01.05	PART NAME: HD6C 62F系列图
		CHECKED: 卓涛 2021.01.05	PART NO. 01.HDEC62FXXXXXXXXXX
TOLERANCE: X.X ±0.35 X.XX ±0.25 X.XXX ±0.15 Angle ±3.0°	APPROVED: 卓涛 2021.01.05	DRAW NO.	SHEET NO. 01 OF 01
SCALE:1:1 SIZE:A4			